



EMERGENCY CHAIN

WINDPROOF POLYZENE GASKET

PHOTO-EYE BARRIERS

OPENABLE SIDE RAIL TWO PIECES

MOTOR

Power	1,7KW
Feeding	230 Vac three-phase triangle - 400 Vac center
Brake	110 Vdc (230 Vac 0,3ms 30Vdc release)
Working temps	-20°C / +60°C
Protection class	IP54


CONTROL PANEL

Feeding	230 Vac 50-60Hz
Output	Threephase 230 Vac
Power	Max 2,2 kW
Brake	10 - 300 VDC (adjustable)
Flashlight output	Single phase 230 Vac
Button input	n.o. contact
Stop input	n.c. contact
Photo-eye input	n.c. contact
Safety input	n.c. contact
Radar input	n.o. contact
Feeding acc.	24 Vdc - 830 mA (tot. max. 20W)
Work temps	-20°C / +60°C
Sizes	200x125x75
Protection class	IP54



ALU.PACK

FOLDING DOOR

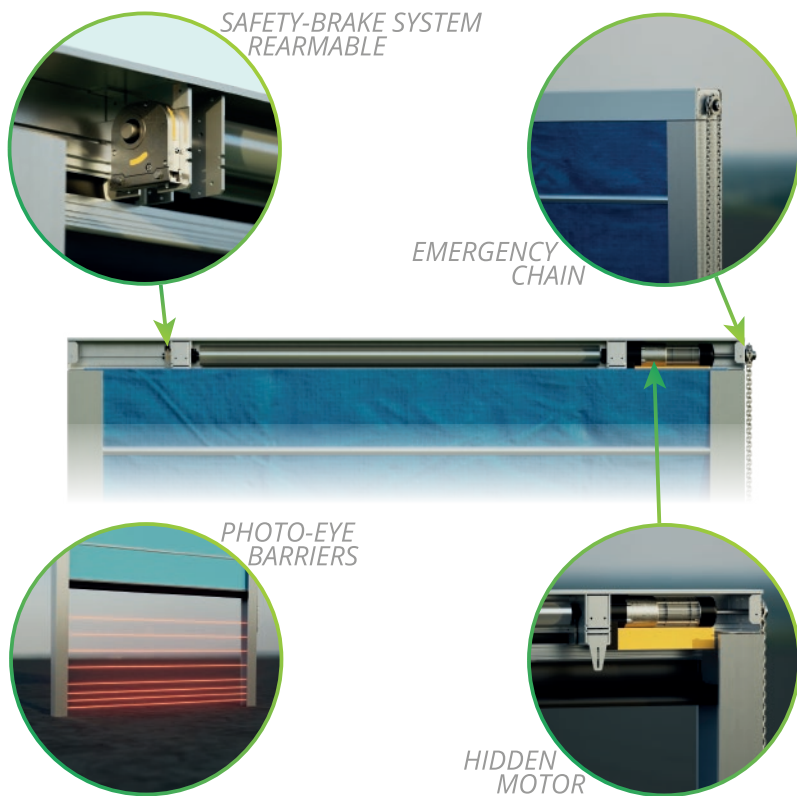

INSIDE HORIZONTAL MOTOR

Capacity	up to 1520Kg
Power	1,1KW
Absorption	3,6/2A
Voltage	~3 230/40V
Frequency	50Hz
Rotation speed	47,7rpm
Output torque	120-180Nm



CONTROL PANEL

Feeding	230 Vac, 50-60Hz
Output	Threephase 230 Vac
Power	Max 2,2 kW
Brake	10 - 300 VDC (adj.)
Button input	n.o. contact
Stop input	n.c. contact
Photo-eye input	n.c. contact
Safety input	n.c. contact
Radar input	n.o. contact
Feeding acces.	24Vdc 830mA
Working temps	-20°C / +60°C
Sizes	200x125x75
Protection class	IP54



PHOTO-EYE BARRIERS

Feeding	12-30Vdc / 24Vac
Consumption max.	TX:70mA / RX:30mA
Response time	50ms
Working temps	-20°C / +50°C
Protection grade	IP67
Ray height	2528
No. channels	20



SAFETY-BRAKES SUSTEM REARMABLE

Torque	up to 220Nm
RPM max.	50rpm
Protection grade	IP65
Weight	2,230Kg
Rearm torque	30Nm

